



The practical submersible pump for using rainwater.

With a stepless hight adjustable floatation switch it is possible to vary the high and low switching levels seamlessly. In addition, the switch can be floatation set to continuous mode.

The integrated floatation switch and the storage compartment for accessories make this rainwater barrel pump the highlight of the garden season.






Logistic Information:

Sales unit: Type: E-RFP 3046 4 pcs 1,280 pcs 20`: Art. No.: 41.704.31 40`: 2,600 pcs Ident- No.: 01017 40`HC: Bar code: 4006825 544053 3,410 pcs Packaging: 250 x 220 x 360 mm Weight: 5.7 kg





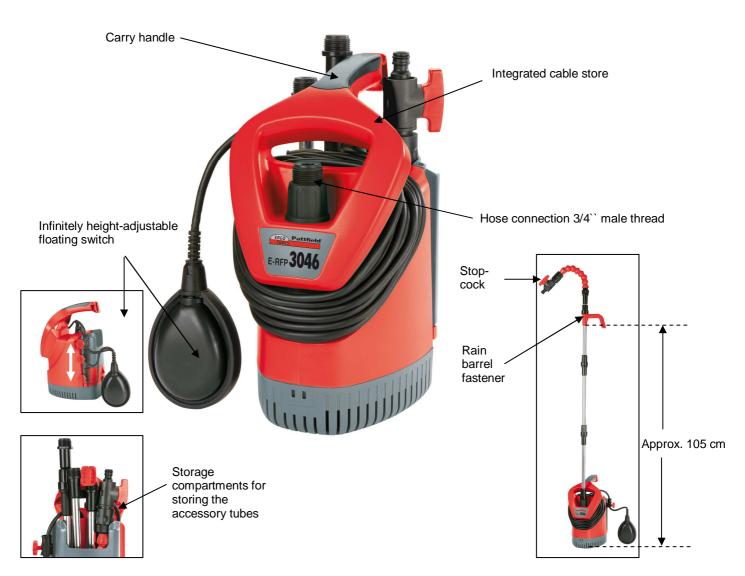

Features:

- Carrying handle with integrated cable store
- Seamlessly adjustable floatation switch
- High-quality pump housing made of impact-resistant plastic material
- Flexible pressure tube with stopcock
- Pressure tubes 25, 27, and 30 cm
- Storage compartments for storing the accessory tubes

Technical Data:

Voltage: 230 V ~ 50 Hz
 Power rating: 300 W
 Flow rate, max.: 4,600 l/h

Flow rate max.
 with extension tubes

with extension tubes 1,750 l/h
- Flow height, max.: 11 m
- Submersion depth, max.: 7 m

- Hose connection: 3/4" male thread

- Water temperature, max.: 35 $^{\circ}$ C - Power cable length: 10 m

Logistic Information:

 Type:
 E-RFP 3046
 Tool:
 Rain barrel pump

 Sales unit:
 4 pcs

 Art. No.:
 41.704.31
 20:
 1,280 pcs

 Art. No.:
 41.704.31
 20 :
 1,280 pcs

 Ident- No.:
 01017
 40 :
 2,600 pcs

 Bar code:
 4006825 544053
 40 HC:
 3,410 pcs

 Packaging:
 250 x 220 x 360 mm
 Weight:
 5.7 kg

