

RED RT-SC 920 L Stone Cutting Machine with Laser

With four standard legs which are quick and easy to fit, the rugged RT-SC 920 L stone cutting machine is ideally suited for both stationary and mobile work. It offers a wide range of possibilities and is therefore a highly versatile tool for professional applications. The stone cutting machine can be used for the precise cutting of all kinds of concrete slabs, cobblestones, marble and granite slabs, and bricks and tiles, in a diversity of shapes and sizes. Only a few movements are required to perform both mitre and double mitre cuts and jolly cuts with a length up to 920 mm. An integrated coolant pump ensures that the diamond cutting wheel is perfectly cooled at all times while enabling you to work without interference from dust.

The stone cutting machine is equipped with a laser which shows the exact cutting line on the material to be cut. In addition, the laser unit, which is fastened to the machine by a magnetic adapter, can also be removed from the machine and used as a laser leveler when laying flooring materials or similar. The laser unit is therefore equipped with two spirit levels for the purpose.












Features

- Diamond cutting disc included
- Removable laser, suitable for external work
- RCD-plug for machine safety
- 4-way ball bearing-mounted motor guide
- Infinitely swiveling motor guide from 0° to 45°
- Angle-perfect adjustable angle stop
- Sturdy handle
- Large work table with rubber mat and aluminium stops
- Solid cutting wheel guard made of sheet steel
- Water trough with integrated pump for cooling water supply and drain plug
- Rugged legs



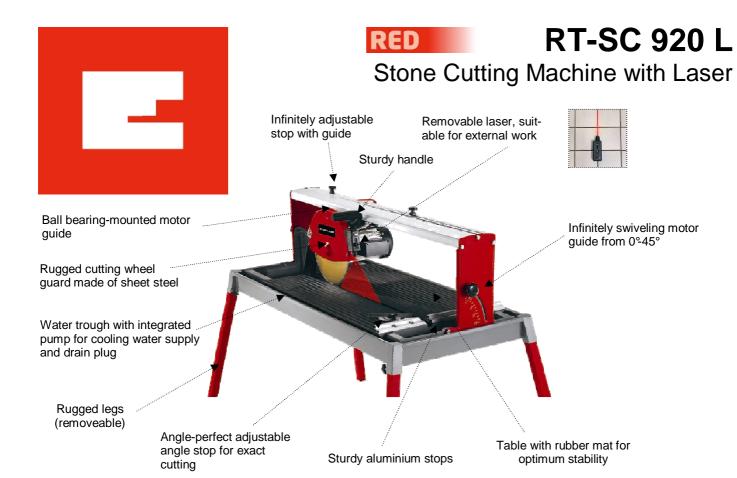



Infinitely swivelling motor guide from 0°45°



Angle-perfect adjustable angle stop for exact cutting



Water trough with integrated pump for cooling water supply and drain plug



RCD-plug for machine safety



40":

40" HC:

Weight:



As special accessory available: Diamond cutting disc Ø 300 mm:

Art.No.: 43.011.78

Logistic Information

Technical Data

Туре:	RT-SC 920 L	
ArtNo.:	43.014.32	
Ident-No.:	01017	
Bar code:	4006825 541199	
Packing:	1,450 x 705 x 490 mm	
Sales unit:	1 pc	
20":	48 pcs	

96 pcs

--- pcs

71.6 kg

230 V ~ 50 Hz Alternating current motor: 2,200 W S2 20 min Power: 3,000 min⁻¹ Rotation speed n₀: Cutting depth 90°. max. 70 mm Cutting depth 45°. max. 55 mm Cutting length: max. 920 mm 0°-45° Bevel cuts: Diamond disc: Ø 300 x Ø 25.4 mm IP 54 Protection class: Work table: 920 x 550 mm



Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations can contain accessories, which are not included in standard extent of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustration similar (in design), production-wise modifications reserved.

File: S:\shared-pool\Product-Documentation\T-Produktbeschreibung\30_n0t\Originale_Englisch_PA04\4301432_01017.doc

Erstelldatum/create date: 23.01.2008 13:23:00Aktualisiert/up dated: 08.02.2008