Easy-to-assemble for versatile cutting options!





The TKS 18/250 UV circular bench saw has been designed for stationary and mobile application. The easy-to-install table extensions provide a large work surface where the longitudinal stop can be used across the entire width. The TKS 18/250 UV has been designed for multi-purpose applications: ripping and crosscuts of lumber, chipboard, plywood, multiplex board, veneered board and plastics. Thanks to its Vbelt drive the table saw is very lownoise and smooth running. Its compact design, ease of handling during transport and its powerful performance make ideal for outdoor use, e.g. at construction sites and for interior decorating work. The saw can be tilted up to 45° for mitre cuts. The sturdy underframe turns the circular bench saw into a sturdy stand-alone saw which can be used at optimum working heights.







TKS 18/250 UV Circular bench saw

Available as special accessory: Carbide-tipped saw blade: Art. No.: 43.111.10

Ø 250 x Ø 30 mm 24 teeth Ident. No.: 01023

250 x Ø 30 mm 24 teeth Ident. No.: 01023 Bar Code: 4006825 431223

Carbide-tipped saw blade: Art. No.: 43.111.11

Ø 250 x Ø 30 mm 48 teeth Ident. No.: 01023 Bar Code: 4006825 431230

 Carbide-tipped saw blade:
 Art. No.:
 43.111.13

 Ø 250 x Ø 30 mm 60 teeth
 Ident. No.:
 01013

Bar Code: 4006825 503166

Logistic Information:


TKS 18/250 UV Sales unit: Type: 1 pc Art. No.: 43.406.40 20``: 150 pcs Ident. No.: 01024 40``: 300 pcs Bar Code: 4006825 501186 40"HC: -- pcs Packing: 725x575x400 mm Weight: 39 kgs (gross)



Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations may contain accessories not included in the standard scope of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustrations will be similar (in design), production-related modifications reserved.without prior notice.

Easy-to-assemble for versatile cutting options!



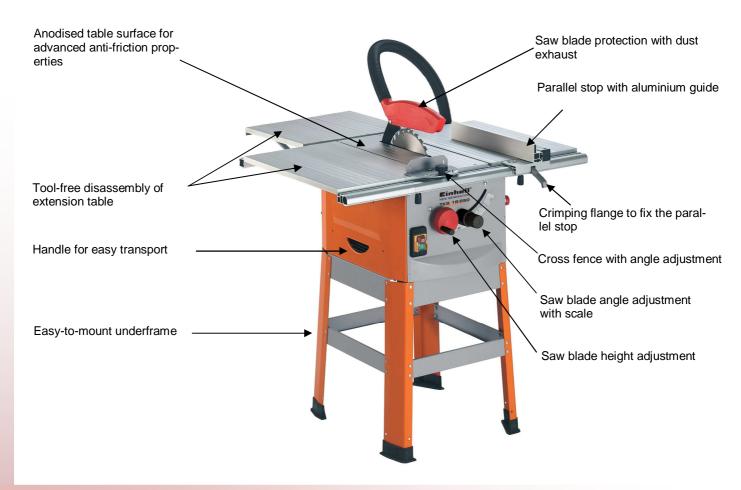

Features:

- Tool-free disassembly of extension table
- Powder-coated housing
- Saw blade angle adjustment with scale
- Saw blade height adjustment
- Cross fence with angle adjustment
- Anodised table surface for advanced anti-friction property
- Saw blade protection with dust exhaust
- Parallel stop with aluminium guide
- Lens for number scale
- Push stick with clamp
- Carbide-tipped saw blade

Technical Data:

- Mains: 230 V ~ 50 Hz - Power: $5,700 \, \text{min}^{-1}$ - Idle speed no: - Cutting height 90 ° 73 mm

- Saw blade:

- Motor rotation range: - Cross fence, tiltable:

- Tool size without additional table:

- Table size:

- Table width extension left/right: - Table length extension back side: - Height without underframe: - Working height with underframe

- Connection for dust exhaust:

1,800 watts S6 40%

45 °.53 mm

Ø 250 x Ø 30 x 3.2 mm, 24 teeth

 $0 - 45^{\circ}$ $2 \times 0 - 45^{\circ}$

approx. 670 x 445 x 1,100 mm

440 x 570 mm 570 x 250 mm 440 x 400 mm 360 mm 900 mm Ø 35 mm

Logistic Information:

TKS 18/250 UV Tool: Circular bench saw Type: Sales unit: 1 pc

20``: 150 pcs Art. No.: 43.406.40 40``: 300 pcs Ident. No.: 01024 40"HC: Bar Code: 4006825 501186 -- pcs Weight: 39 kgs (gross) Packing: 725x575x400 mm



Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations may contain accessories not included in the standard scope of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustrations will be similar (in design), production-related modifications reserved.without prior notice.