


Garage Door Opener TA-G 83

Art.-No.: **21.042.10**

Bar code: 4006825213423

Sales unit: 1 pc

standard swing-out- door sectional door non-swing-out door

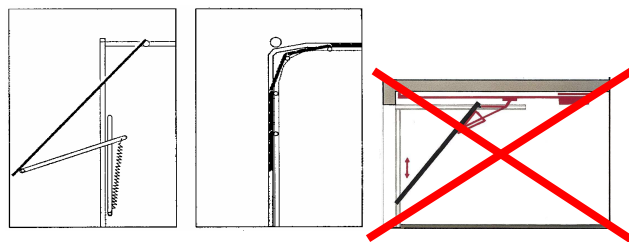

**Universal belt drive garage door opener for
standard swing-out- and sectional doors
Not useable for non-swing-out doors**



Door sizes:

- Swing-out-doors: max. 2,7 m x 4,5 m
- Sectional doors: max. 2,5 m x 4,5 m

- **Very fast installation system**
- The construction made of aluminium press-profiles complies with highest demands regarding resistance to corrosion, stability and saving in weight.
- The low voltage technique allows a maximum of electrical safety.
- Soft-Start/Soft-Stop
- **With integrated light 25 W / 230 V ~**
- Extreme low mounting height of only 39 mm required
- Supplied with factory installed code setting
- Transmitter code manipulation protection blocks the manipulation in the receiver part by unauthorized codes.
- **Warranty: 2 years**

Supplied with:

- Pre-assembled drive unit with integrated microprocessor control
- 2 pieces 6-channel-mini-transmitter HS 434/6 Art.-No. 21.001.95
- Interior Emergency Release

As accessory available:

- | | | |
|--|-----------|--------------------|
| - 6-channel-mini-transmitter | HS 434/6 | Art.-No. 21.001.95 |
| - Internal push button switch | IT 100 | Art.-No. 21.004.00 |
| - Key-lock switch (flush mounted) | ST 100 UP | Art.-No. 21.002.20 |
| - Key-lock switch (surface mounted) | ST 100 AP | Art.-No. 21.002.00 |
| - Electronic code lock | ECS 12 | Art.-No. 21.002.10 |
| - Exterior Emergency release for all types | NER 200 | Art.-No. 21.005.20 |
| - Reinforcing plate for all garage doors | VB 200 | Art.-No. 21.007.60 |

Technical data:

- | | | |
|------------------------|--|---|
| - Drive unit: | Chain drive | Weight: 13,0 kg |
| - Travel range: | 2700 mm | Packing dimensions: 1160 x 180 x 170 mm |
| - Pulling force: | 800 N (80 kg), integrated fail safe device | |
| - Mains: | 230 V~ /50 Hz | |
| - Operating frequency: | 434 MHz | |