

# Split-Air Conditioner SKA 3502 C + H

Art.-No.: 23.652.15

Bar code: 4006825514940

Sales unit: 1 pc

One area – Split-Air Conditioner for wall installation with the functions: Cooling, heating, dehumidifying, time programming device for ON/OFF.

**Complete with remote controlled transmitter** and 4 m cooling agent connecting tubes with flexible insulation (max. 10 m possible at professional installation).

Easy installation of the air conditioner with a **cooling capacity of 3.200 watts** and a heating capacity of **3.600 watts**. Ideal for large rooms until approx. 110 m<sup>3</sup>.

The unit consists of 2 parts, an outdoor part and one for indoors, in order to allow quick cooling and warrant an optimal noise level. Due to the possibility of heating operation, the air conditioner can additionally also be used as "interseasonal heating".

Fan speed with a maximum speed of 450 m<sup>3</sup>/h.

With the **automatic dehumidification** the units evaporates from its surrounding max. **1.0 l/h** excess humidity. **Timer for programme settings, Automatic- and night functions**.

All functions can be set with the **remote controlled transmitter.** Supplied with LCD indicator. Motorized ventilation lamella in the indoor unit.

### **Dimensions:**

Indoor unit (WxDxH): 740x180x250 mm Outdoor unit (WxDxH): 720x260x430 mm

## Weight:

Indoor unit: 9.5 kg
Outdoor unit: 39.3 kg

**Packing dimensions indoor unit:** 870x280x336 mm **Packing dimensions outdoor unit:** 765x350x500 mm

## Features:

- LED-display (1)
- Air escape plate fin (2)
- Air suction grid (3)
- Remote control (4)
- Fan (5)
- Pipe connection

### **Technical data:**

Free of FCKW (R407C)Energy-Efficiency-Class:

Energy-Efficiency-Class: EER / COP: 2.

EER / COP:
Energy consumption at cooling:
Cooling capacity:
Heating capacity:
Air throughput:


2.50 / 2.42
665 kwh / year
3.200 watts
3.600 watts
450 m³/h

Capacity of humidity reduction max: 1.0 l/h


Mains: $220 - 240 \text{ V} \sim 50 \text{ Hz}$ Refrigerant quantity:1250 g for 4 m pipeNoise level: $Indoors: \le 40 \text{ dB (A)}$ 

Outdoors:  $\leq 52 \text{ dB (A)}$ 

Characteristics according to EN 14511





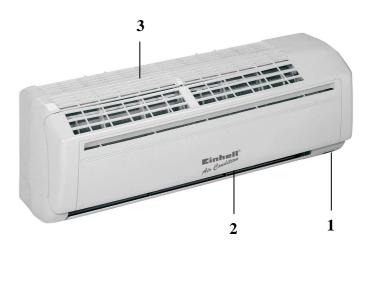

Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations can contain accessories, which are not included in standard extent of delivery.

Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustration similar (in design), production-wise modifications reserved File: S:\shared-pool\Product-Documentation\T-Produktbeschreibung\30\_n0t\Originale\_Englisch\_PA04\2365215\_01015.doc

Erstelldatum / create date: 12/08/2005 14:51:00

Aktualisiert / up dated: 08/11/2006