Easy-to-assemble for versatile cutting options!





The TKS 18/250 WS circular bench saw has been designed for stationary and mobile application. The easy-to-install table extensions provide a large work surface where the longitudinal stop can be used across the entire width. The TKS 18/250 WS has been designed for multipurpose applications: ripping and crosscuts of lumber, chipboard, plywood, multiplex board, veneered board and plastics. Thanks to its V-belt drive the table saw is very low-noise and smooth running. Its compact design, ease of handling during transport and its powerful performance make ideal for outdoor use. e.g. at construction sites and for interior decorating work. The saw can be tilted up to 45° for mitre cuts. The sturdy underframe turns the circular bench saw into a sturdy stand-alone saw which can be used at optimum working heights.









TKS 18/250 WS Table Saw

Available as special accessory: Carbide tipped saw blade: Art.-No.: 43.111.10

Ø 250 x Ø 30 mm 24 teeth Ident-No.: 01023

Bar-Code: 4006825 431223

 Carbide tipped saw blade:
 Art.-No.:
 43.111.11


 Ø 250 x Ø 30 mm 48 teeth
 Ident-No.:
 01023

Bar-Code: 4006825 431230

 Carbide tipped saw blade:
 Art.-No.:
 43.111.13

 Ø 250 x Ø 30 mm 60 teeth
 Ident-No.:
 01013

 Bar-Code:
 4006825 503166




TKS 18/250 WS Sales unit: Type: 1 pc Art.-No.: 43.406.44 20``: 150 pcs Ident-No.: 01016 40``: 300 pcs **Bar Code:** 4006825 531022 40"HC: -- pcs

Packing: 725x575x400 mm Weight: 39.5 kgs (gross)



Easy-to-assemble for versatile cutting options!



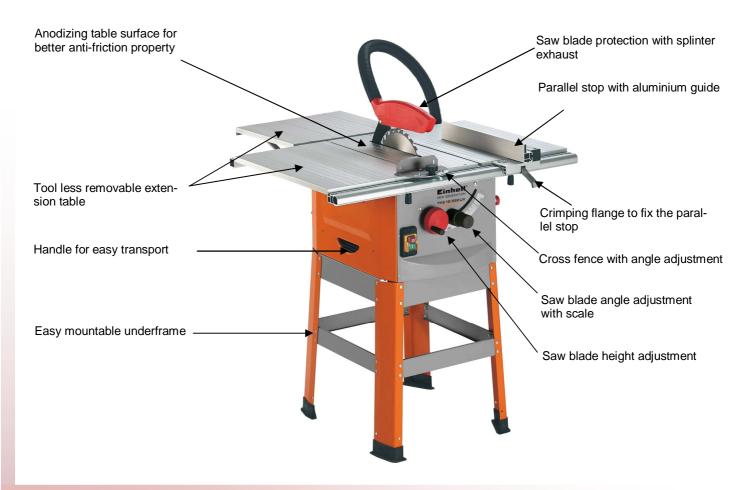

Features:

- Tool-free disassembly of extension table
- Powder-coated housing
- Saw blade angle adjustment with scale
- Saw blade height adjustment
- Cross fence with angle adjustment
- Anodised table surface for advanced anti-friction property
- Saw blade protection with dust exhaust
- Parallel stop with aluminium guide
- Lens for number scale
- Push stick with clamp
- Carbide-tipped saw blade

Standard accessory:

- Waistcoat

Technical Data:

 $\begin{array}{lll} \text{- Mains:} & 230 \text{ V} \sim 50 \text{ Hz} \\ \text{- Power:} & 1,800 \text{ watts } $6\,40\% \\ \text{- Idle speed}_{\text{ no:}} & 5,700 \text{ min}^{-1} \\ \text{- Cutting height} & 90 \, ^{\circ}.73 \text{ mm} \\ & 45 \, ^{\circ}.53 \text{ mm} \end{array}$

- Saw blade:

Motor rotation range: 0 - 45°
 Cross fence, tiltable: 2 x 0 - 45°

- Tool size without additional table: ca. 670 x 445 x 1100 mm

- Table size:

Table width extension left/right:
Table length extension back side:
Height without underframe:
Working height with underframe
Connection for dust exhaust:
570 x 250 mm
440 x 400 mm
360 mm
900 mm
Ø 35 mm

Logistic Information:

TKS 18/250 WS Type: Tool: **Table Saw** Sales unit: 1 pc Art.-No.: 43.406.44 20``: 150 pcs 40``: Ident-No.: 01016 300 pcs 40"HC: **Bar Code:** 4006825 531022 -- pcs 725x575x400 mm 39.5 kgs (gross) Packing: Weight:



440 x 570 mm

Ø 250 x Ø 30 x 3.2 mm, 24 teeth