
OPERATION cont.


7. EMPTYING

The level of material in the shredded material debris box can be checked by looking through the slots on the side of the cover. Always empty the shredded material debris box in good time to prevent it from overfilling.


Switch off the device at the ON/OFF switch.



Press the safety switch down to release the shredded material debris box.



Take the shredded material debris box out at the front.



TRO	UBL	ESI	001	IN	G
					<u> </u>

Problem Cause		Remedy	
The motor does not start	Power Failure	Check the mains lead, plug and fuse	
	Motor circuit breaker has been triggered	Press the reset button	
	The safety switch is not making contact	Insert the debris box correctly and push the safety switch upwards until it engages	
	The switch for selecting the direction of rotation is in it's centre position	Set the direction of rotation on the switch	
Material is not drawn in by the shredder	The shredding blade is running in reverse.	Change the direction of rotation.	
	Material blockage in the filling funnel	Change the direction of rotation and pull the material out of the funnel. Feed in thick branches again so that the blade does not immediately engage again in the notches it previously cut.	
	The shredding blade is jammed	Change the direction of rotation. The blade will now release the jammed material.	
The material is not shredded properly	The cutting plate is not set correctly	Adjust the cutting plate.	

MAINTENANCE

ALWAYS PULL OUT THE MAINS **POWER PLUG BEFORE STARTING ANY** CLEANING WORK!

- Clean the machine regularly. This will help to keep the machine in good working order and is the basis for a long working life.
- · Keep the vent slots clean while you work.
- · Clean the plastic body and other plastic parts with a mild household cleaning agent and a damp cloth. Do not use any aggressive agents or solvents for cleaning purposes.
- Never clean the shredder by spraving with water.
- · Prevent water getting inside the machine at all cost.
- · Check the chassis securing screws from time to time to ensure that they are
- If you do not intend to use the shredder for a lengthy period, protect it from corrosion using environmentally friendly oil.
- · Store the device in a dry room.
- Store the device out of reach of children.

The equipment must be cleaned and conserved at the end of the season. Important: Wear work gloves! Undo the 4 Hex screws fully. The Hex screws can only be undone – they cannot be removed. Undo the retaining screw on the bottom side of the equipment as far as the stop. The retaining screw can only be undone - it cannot be removed. Now you can take off the cover. Clean the cutting compartment, the counter blade and the cutting unit and cover them with a thin coat of vegetable oil before installing everything again. At the beginning of the new season the counter blade must be correctly adiusted

ADDITIONAL INFORMATION

Danger

Sound and vibration

Sound and vibration values were measured in accordance with the standards EN ISO 3744: 1995, EN ISO 11201: 1995, and EN ISO 20643: 2005.

	at the operator position:	79.4 dB(A)
		3 dB (A)
wa	sound power level	92 dB (A)

Operating mode S6 40%: Continuous operation with idling (cycle time 10 minutes). To ensure that the motor does not become excessively hot it may only be operated for 40% of the cycle at the specified rating and must then be allowed to idle for 60% of the cycle.

Wear ear-muffs.

The impact of noise can cause damage to hearing.

Total vibration values (vector sum of three directions) determined in accordance with FN 60745

- Keep the noise emissions and vibrations to a minimum.
- · Only use appliances which are in perfect working order.
- Service and clean the appliance regularly
- Adapt your working style to suit the appliance.
- · Do not overload the appliance.
- Have the appliance serviced whenever necessary
- Switch the appliance off when it is not in use.
- Wear protective gloves.



For EU countries only

Never place any electric power tools in your household refuse.

To comply with European Directive 2012/19/EC concerning old electric and electronic equipment and its implementation in national laws, old electric power tools have to be separated from other waste and disposed of in an environment-friendly fashion, e.g. by taking to a recycling depot.

Recycling alternative to the return request:

As an alternative to returning the equipment to the manufacturer, the owner of the electrical equipment must make sure that the equipment is properly disposed of if he no longer wants to keep the equipment. The old equipment can be returned to a suitable collection point that will dispose of the equipment in accordance with the national recycling and waste disposal regulations. This does not apply to any accessories or aids without electrical components supplied with the old equipment.


The reprinting or reproduction by any other means, in whole or in part, of documentation and papers accompanying products is permitted only with the express consent of the iSC

Subject to technical changes

Declaration of Conformity

SC GmbH · Esche	C GmbH · Eschenstraße 6 · D-94405 Landau/Isar		
explains the following confo the following product	rmity according to EU directives an	d norms for	
	Silent Shredder SSH-2540CBL	J (Ozito)	
2014/29/EU 2005/32/EC_2009/125/EC 2014/35/EU 2014/32/EU 2014/32/EU 2014/53/EC 2014/53/EC 2014/68/EU 90/396/EC_2009/142/EC B9/686/EC_96/58/EC 2011/65/EU	X 2006/42/EC Annex IV Notified Body: Notified Body: Reg. No: X 2000/14/EC_2005/88/EC X Annex V Annex V Noise: measured L _{uit} = 91,3 dB (A) P = 2,6 KW; (66/40%); L/Ø = cm Notified Body: 2012/46/EU Emission No:	; guaranteed L _{wa} = 94 dB (A)	
	nd references: EN 50434; EN 60 014-1; EN 55014-2; EN 61000-3-2		
andau/Isar, den 13.12.2017	Weichselgartner/General-Manager Liu	La Hangement	
irst CE: 17 rtNo.: 30.002.07 INo.: 1102 subject to change without notice	7	Archive-File/Record: NAPR018142 Documents registrar: Alex Kurz Wiesenweg 22, D-94405 Landau/Isar	

DESCRIPTION OF SYMBOLS

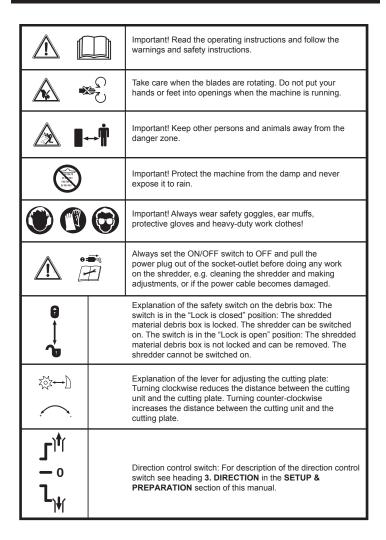

SPARE PARTS

- Spare parts can be ordered from the Special Orders Desk at your local Bunnings Warehouse or Homebase store.
- For further information, or any parts visit

www.ozito-div.co.uk or contact Ozito Customer Service: Great Britain: 0151 294 4488

Ireland: 1850 882711

E-mail: info@ozito-diy.co.uk

SERVICE INFORMATION

Please note that the following parts of this product are subject to normal or natural wear and that the following parts are therefore also required for use as consumables.

Category	Example
Wear parts*	Roller (cutter head)
Consumables*	Metal cutting plate (pressure plate)
Missing parts	

* Not necessarily included in the scope of delivery!

A ELECTRICAL SAFETY

WARNING! When using mains-powered tools, basic safety precautions, including the following, should always be followed to reduce risk of fire, electric shock, personal injury and material damage.

Read the whole manual carefully and make sure you know how to switch the tool off in an emergency, before operating the tool

Save these instructions and other documents supplied with this tool for future reference Before you connect the equipment to the mains supply make sure that the data on the rating plate are identical

GENERAL POWER TOOL SAFETY

ARNING! "Read all safety warnings, instructions, illustrations and specifications provided with this power tool." Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

- Save all warnings and instructions for future reference. The term "power tool" in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool 1. Work area safety
- . Keep work area clean and well lit. Cluttered or dark areas invite accidents.
- Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust. Power tools create sparks which may ignite the dust or fumes
- c. Keep children and bystanders away while operating a power tool. Distractions can cause you to 2. Electrical safety
- Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools. Unmodified plugs and matching outle reduce risk of electric shock.
- Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges and refrigerators. There is an increased risk of electric shock if your body is earthed or grounded.
- c. Do not expose power tools to rain or wet conditions. Water entering a power tool will increase the risk of electric shock
- d. Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Geep cord away from heat, oil, sharp edges or moving parts. Damaged or entangled cords increase the risk of electric shock.
- When operating a power tool outdoors, use an extension cord suitable for outdoor use. Use of a cord suitable for outdoor use reduces the risk of electric shock.
- If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) rotected supply. Use of an RCD reduces the risk of electric shock Personal safet
- a. Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating power tools may result in serious personal injury.
- Use personal protective equipment. Always wear eye protection. Protective equipment such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries
- Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool. Carrying power tools with your finger on the switch or energising power tools that have the switch on invites accidents.

If the supply cord is damaged, it must be replaced by an electrician or a power tool repairer in order to avo

When using an extension lead on a reel, always unwind the lead completely. Use of an extension lead not suitable for the power input of the tool or which is damaged or defective may result in a risk of fire and elec

Remove any adjusting key or wrench before turning the power tool on. A wrench or a key left attached to a rotating part of the power tool may result in personal injury.

- Do not overreach. Keep proper footing and balance at all times. This enables better control of the power tool in unexpected situations.
- Dress properly. Do not wear loose clothing or jewellery. Keep your hair, clothing and gloves away from moving parts. Loose clothes, jewellery or long hair can be caught in moving part If devices are provided for the connection of dust extraction and collection facilities, ensure
- these are connected and properly used. Use of dust collection can reduce dust-related hazards. Do not let familiarity gained from frequent use of tools allow you to become complacent and
- ignore tool safety principles. A careless action can cause severe injury within a fraction of a second a. Do not force the power tool. Use the correct power tool for your application. The correct power tool
- will do the job better and safer at the rate for which it was designed Do not use the power tool if the switch does not turn it on and off. Any power tool that cannot be
- d with the switch is dangerous and must be repaired. Disconnect the plug from the power source and/or remove the battery pack, if detachable, from the power tool before making any adjustments, changing accessories, or storing power tools.
- Such preventive safety measures reduce the risk of starting the power tool accidentally. Store idle power tools out of the reach of children and do not allow persons unfamiliar with the
- power tool or these instructions to operate the power tool. Power tools are dangerous in the hands of untrained users.
- Maintain power tools and accessories. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. Many accidents are caused by poorly maintained power
- Keep cutting tools sharp and clean. Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.
- Use the power tool, accessories and tool bits etc. in accordance with these instructions, taking into account the working conditions and the work to be performed. Use of the power tool for ations different from those intended could result in a hazardous situation
- Keep handles and grasping surfaces dry, clean and free from oil and grease. Slippery handles and grasping surfaces do not allow for safe handling and control of the tool in unexpected situations.
- Have your power tool serviced by a qualified repair person using only identical replacement parts. This will ensure that the safety of the power tool is maintain

L SAFETY INSTR

IMPORTANT! READ CAREFULLY BEFORE USE KEEP FOR LATER REFERENCE

ead these operating instructions carefully before you use the machine. This equipment is not designed to be used by people (including children) with limited physical, sensory or mental capacities or those with no experience and/or knowledge unless they are supervised by a person v responsible for their safety or they have received instructions from such a person in how to use the equipr safely. Children must always be supervised in order to ensure that they do not play with the equipment.

JTION! The ON/OFF switch must be set to OFF and the power plug removed from the Socket outlet before cleaning or doing any other work on the shredder and whenever the cable becomes tangled. The shredder will continue to run briefly after it is switched off.

The operator is responsible for the safety of third parties within the working radius of the shredde Make sure that the shredder is properly closed (loading funnel and ejector) before you start up the motor. The shredder must be placed on a flat and firm surface where it can stand securely.

- Always wear gloves and safety goggles when working with the shredder.
- · We recommend ear-muffs when working with shredders which have no noise-insulating features Each time before you leave the shredder, switch off the motor and pull out the ignition key, spark plug connector or power plug.
- Maintenance and cleaning work on the shredder as well as the removal or adjustment of any safety devices may only be performed when the motor is at a standstill and the ignition key, spark plug connector or power plug has been pulled out.
- The safety devices supplied with the shredder (e.g. the ejector) must be used.
- The shredder must be assembled correctly before it is put into operation.
- Examine the shredder each time before you use it. Do not use the shredder if any safety devices are damaged or worn. Never put safety devices out of operation.
- Use the shredder only for the purpose specified in these instruction
- Work only in good visibility.
- · Always make sure of your footing while working.
- Never leave the shredder unattended at your work place. Store the shredder in a safe place during
- If you interrupt your work to move to a different position it is imperative to switch off the shredder while you are
- · Never use the shredder in the rain or in moist or wet conditions Protect the shredder from the damp and rain.
- Always wear suitable clothing to protect your head, hands and feet from injury. Wear a helmet, goggles or visor, high boots or strong shoes, long trousers made of tough aterial, and work gloves. Keep the shredder away from other persons, particularly children and pets.
- Do not use the shredder without protection devic

CAUTION! The guard is vital for your safety and for the safety of others, and it is also essential for the grass trimmer to work correctly. Failure to observe this instruction will not only create a potential hazard, it will also result in the loss of your rights under the warran

- Keep the air vents clear of dirt.
- After use, unplug the machine and check it for damage.
- When you are not using the shredder, keep it in a dry place out of the reach of children
- Check the screws regularly to see that they are properly tightened The mains voltage must be the same as the voltage specified on the rating plate
- Power cables used with the shredder must not be of a lighter duty class than HO7RN-F rubber-insulate flexible cables according to DIN 57282/ VDE 0282 with a minimum diameter of 1.5 mm2. Plug connectors
- must be equipped with earthing contacts and the coupling must be rain-water-protected. Use only original replacement parts for repair and maintenance purposes.
- Have repairs carried out only by a qualified electrician
- Examine the shredder for signs of wear or damage each time before you use it and after any collisions. Have
- essential repairs carried out without delay. Never use replacement parts or accessories which are not foreseen or recommended by the manufacture

whenever it is not being used. Before you begin your work, examine the material you want to shred. Remove any foreign bodies. Continue

Pull out the power plug before carrying out any inspection, cleaning or other work on the shredder and

to watch out for foreign bodies while you are working. If you come across any foreign bodies while shredding, shut down the machine and remove the items in question

- Keep the machine away from other persons, particularly children and pets
- Use the machine only in the way described in these operating instruction
- The electric circuit must be protected at least by a 16A fuse. The efficiency of the machine will be greatly reduced if a connecting cable with too small a cross section is used. A conductor cross section of at least 3x1.5 mm2 is required for cables up to 25 m long, and one of at
- east 3x2.5 mm2 for cables longer than 25 m.
- If the machine has to be lifted for transporting, be sure to switch off the motor first and wait for the cutter to come to a standstill. Each time before you leave the machine, switch off the motor and pull out the power plug Before you connect the machine to the power supply, make sure that the loading funnel is properly connected to the motor housing and the release screw tightened.
- If the garden refuse shredder vibrates excessively, turn off the motor, pull out the power plug, and find out immediately what is causing the vibrations. Intensive vibration is usually a sign that something is wrong. Do not wear loose clothing or clothing with hanging belts or cords.
- Do not use the machine on a payed area that has been graveled where discharged material may cause
- Ensure that the loading funnel inlet is empty before you start the machine.
- Keep your head and body away from the infeed opening.
- Do not move your hands, other body parts or clothing into the infeed chamber, ejector chute or near other noving parts. • Make sure that you are balanced and standing on a firm surface at all times. Do not stretch forwards. Never

stand higher than the machine when feeding material into it Keep away from the discharge zone when you start the machine.

- If foreign bodies get into the cutting tool or the machine generates unusual noises or vibrates in a strange way, switch off the motor immediately and allow the machine to come to a standstill. Pull the plug and carry out the following work: Check the machine for signs of damage

Damaged or illegible labels must be replaced

Never use the machine while other people are nearby.

Children must not be permitted to use the machine.

Check that all the parts are secure and tightenthem if necessary. ve any damaged parts replaced or repaired, but use only spare parts of the same type and equivaler

other foreign bodies.

• If the machine is blocked switch off the motor and pull the plug before you start the cleaning procedure. Ensure that the motor is clear of waste and other accumulations to protect the motor from suffering damage or possibly catching fire.

When inserting material take special care to ensure that it does not contain any metal, stones, bottles, cans or

Do not allow processed material to accumulate within the discharge area; this could prevent the machine being able to discharge correctly and result in material recoiling through the infeed opening.

Wear ear protectors and safety goggles. Wear these throughout the time the machine is in operation

When servicing the cutting tool, remember that it may still be moving due to the starting mechanism, even if the motor is not running because of the cover interlock.

Before starting the machine, check all screws, nuts, bolts and other fastening materials to ensure that they are secure and that all covers and guards are in position. Damaged or illegible labels must be replaced.


Connect the equipment to the power supply only via an earth-leakage circuit breaker with max. 30mA tripping

Ensure that all the covers and guards are in position and in good working order. Do not tip the machine whilst the motor is running.

Allow the tool to cool before carrying out any maintenance work, adjustments, etc.

The tool may only be used outdoors (i.e. not in the vicinity of a wall or any other ridged object)

Switch off the machine before you fit or remove the collection container

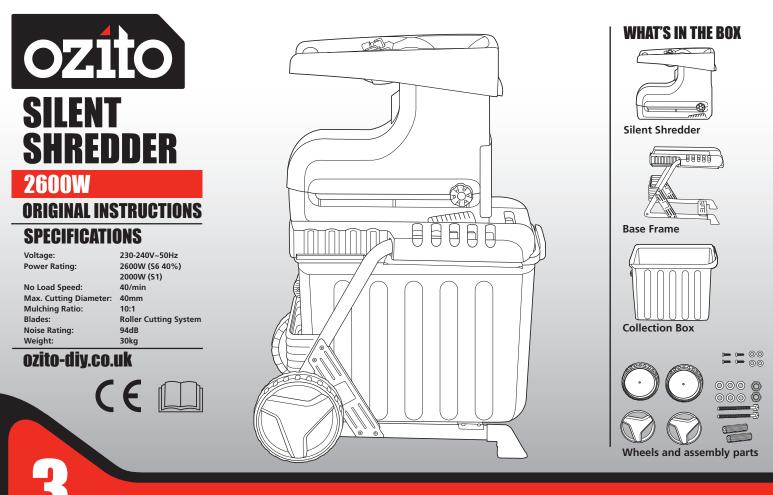

YEAR REPLACEMENT WARRANTY

SSH-2540CBU

WARRANTY

All of our products undergo strict quality checks to ensure that they reach you in perfect condition. In the unlikely event that your device develops a fault, please contact our service department at the address shown on this guarantee card. You can also contact us by telephone using the customer service number shown. Please note the following terms under which quarantee claims can be made:

. These warranty terms regulate additional warranty services, which the manufacturer mentioned below promises to buyers of its new products in addition to their statutory guarantee claims are not affected by this guarantee. Our guarantee is free of charge to you.

2. The warranty services only covers defects due to material or manufacturing faults on a product which you have bought from the manufacturer mentioned below are limited to either the rectification of said defects on the product or the replacement of the product, whichever we

Please note that our devices are not designed for use in commercial, trade or professional applications. A guarantee contract will not be created if the device has been used by commercial, trade or industrial business or has been exposed to similar stresses during the guarantee period.

3. The following are not covered by our guarantee:

- Damage to the device caused by a failure to follow the assembly instructions or due to incorrect installation, a failure to follow the operating instructions (for example connecting it to an incorrect mains voltage or current type) or a failure to follow the maintenance and safety instructions or by exposing the device to abnormal environmental conditions or by lack of care and maintenance.

- Damage to the device caused by abuse or incorrect use (for example overloading the device or the use or unapproved tools or accessories). ingress of foreign bodies into the device (such as sand, stones or dust. transport damage), the use of force or damage caused by external forces (for example by dropping it).

- Damage to the device or parts of the device caused by normal or natural wear or tear or by normal use of the device

4. Your Product is guaranteed for a period of 36 months from the original date of purchase and is intended for DIY (Do It Yourself) use only. Warranty excludes consumable parts. Guarantee claims should be submitted before the end of the guarantee period within two weeks of the defect being noticed. No guarantee claims will be accepted after the end of the guarantee period. The original guarantee period remains applicable to the device even if repairs are carried out or parts are replaced. In such cases, the work performed or parts fitted will not result in an extension of the guarantee period, and no new guarantee will become active for the work performed or parts fitted. This also applies if an on-site service is used.

IN ORDER TO MAKE A CLAIM UNDER THIS WARRANTY YOU MUST RETURN THE PRODUCT TO THE PLACE OF PURCHASE WITH YOUR REGISTER RECEIPT

Please refer to the restrictions of this warranty concerning wearing parts, consumables and missing parts as set out in the service information in these operating instructions.

CUSTOMER SERVICE HELPLINE GB: 0151 294 4488 IRL: 1850 882711 Ozito-diy.co.uk

KNOW YOUR PRODUCT

7. Wheel

11. Foot


8. Safety Switch


9. Shredded material debris box

10.Counter blade adjustment knob

SILENT SHREDDER

- 1. Reset button
- 2. Off button
- 3. On button
- 4. Direction control switch
- 5. Hopper
- 6. Handle



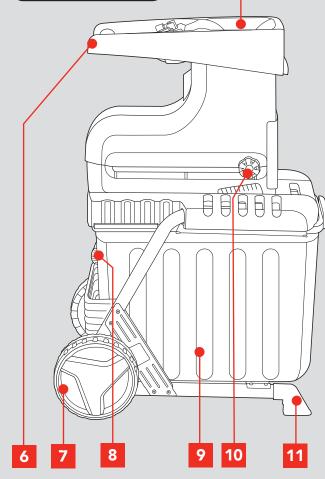

ONLINE MANUAL Scan this QR Code with your

mobile device to take you to the online manual.



BEFORE USE

Items Supplied



Please check that the article is complete as specified in the scope of delivery. If parts are missing, please contact our service centre or the sales outlet where you made your purchase at the latest within 5 working days after purchasing the product and upon presentation of a valid bill of purchase. Also, refer to the warranty table in the service information at the end of the operating instructions

- Open the packaging and take out the equipment with care.
- · Remove the packaging material and any packaging and/or transportation braces (if available).
- · Check to see if all items are supplied
- Inspect the equipment and accessories for transport damage.
- If possible, please keep the packaging until the end of the guarantee period.

Danger!

The equipment and packaging material are not toys. Do not let children play with plastic bags, foils or small parts. There is a danger of swallowing or suffocating!

Proper Use

This electric garden refuse shredder is designed only for shredding organic garden waste. Place biologically degradable material, e.g. leaves, branches, dead flowers etc., into the loading funnel inlet

The equipment is to be used only for its prescribed purpose. Any other use is deemed to be a case of misuse. The user / operator and not the manufacturer will be liable for any damage or injuries of any kind caused as a result of this.

Please note that our equipment has not been designed for use in commercial, trade or industrial applications. Our warranty will be voided if the machine is sed in commercial, trade or industrial businesses or for equivalent purposes.

Caution! Residual risks

Even if you use this electric power tool in accordance with instructions certain residual risks cannot be ruled out. The following hazards may arise in connection with the equipment's construction and layout:


- 1. Lung damage if no suitable protective dust mask is used.
- 2. Damage to hearing if no suitable ear protection is used.
- 3. Health damage caused by hand-arm vibrations if the equipment is used over a prolonged period or is not properly guided and maintained.

ASSEMBLY


2. ASSEMBLY


ENSURE THE TOOL IS DISCONNECTED **FROM THE POWER SUPPLY BEFORE ASSEMBLY.**

- Carefully place the shredder housing upside down on a flat surface.
- Position the base frame to the underside of the motor unit aligning the four screw holes





3. Screw the motor unit and the base frame together using the four small screws and washers provided.







4. To fit the wheels to the base frame first slide one sleeve into the hole in each of the wheels.





5. Then insert one bolt with washer through each sleeve. Place a washer on the end of the bolt, then insert through the hole in the base frame, secure with washer and nut.





VEAR REPLACEMENT WARRANTY

SETUP & PREPARATION


3. DIRECTION

Direction Control Switch

THE SWITCH FOR SELECTING THE DIRECTION OF ROTATION CAN ONLY BE MOVED WHEN THE SHREDDER IS SWITCHED OFF


Position (down arrow)

The material is automatically drawn in by the blade and shredded.



Position (up arrow)

The blade rotates in the opposite direction to release jammed material. After moving the selector switch to the "up" position, press and hold the green knob of the ON/OFF switch. The blade will direction. As soon as you release the ON/OFF switch, the shredder will stop automatically.



THE ALWAYS WAIT UNTIL THE SHREDDER HAS REACHED A STANDSTILL BEFORE YOU SWITCH IT ON AGAIN

Note: If the switch for selecting the direction of rotation is in its centre position, the motor will not start.

Large items or pieces of wood will be discharged both in the cutting and in the release direction after the blade has been started and reversed several times

Motor Protection

An overload (for example if the blade is jammed) will cause the machine to cut out after a few seconds. To protect the motor from damage the motor protection switch stops the power supply automatically. Wait for at least one minute before you press the reset button so that you can restart the machine.

Then press the ON/OFF switch.


If the blade becomes jammed, turn the switch for selecting the direction of rotation to the "up" position before you switch on the shredder again.


4. PLATE ADJUSTMENT

The shredder operates by using a rolling cutter head, the cutter head rotates and pulls the material past a metal cutting plate which grinds and cuts the material.

The cutter head and cutting plate are perfectly adjusted at the factory. Only if it suffers wear does the plate require adjustment (switch the machine on for this purpose).


To ensure the best possible results from your shredder, the gap between the cutter head and cutting plate should be approx. 0.50mm. There is an adjustment device on the right-hand side of the plastic housing for this purpose. Turn the knob clockwise so that the screw moves towards the shredding cutter head. After a half turn the cutting plate will have moved 0.50mm closer to the shredding cutter head. After completing this adjustment check whether the cutter head produces the desired results.






IMPORTANT: IF THE SHREDDING BLADE TOUCHES THE PLATE, IT WILL CUT IT AND SMALL METAL CHIPS MAY FALL OUT OF THE DISCHARGE OPENING. THIS IS NOT A FAULT, BUT IT MUST ONLY BE ADJUSTED AS MUCH AS NECESSARY SINCE THERWISE THE PLATE WILL SUFFER PREMATURE WEAR.

10. Lock the shredded material debris box with safety switch in position by pushing upwards.





6. Press the wheel caps onto the 7. Fit the feet to the base frame



8. Carefully turn the shredder

material debris box into

the mount. Ensure that the


shredded material debris

box runs above the guide


over onto its stand.

9. Slide the shredded

rails.








start to rotate in the opposite

OPERATION

5. STARTING

Safety Switch

When using the device the shredded material debris box must be securely in position and the safety switch locked.




ON/OFF Switch


TO REDUCE THE RISK OF ELECTRICAL SHOCK, WE RECOMMEND THE USE OF A RESIDUAL CURRENT DEVICE (RATED 30mA OR LESS).

Note: The device has a internal zero voltage switch. This prevents the device restarting unintentionally after a power failure.

1. Press the green (I) button to switch on the shredder.



2. Press the red (O) button to switch it off.




6. SHREDDING

THE SHREDDER IS NOT RECOMMENDED FOR MATERIALS INCLUDING GLASS, METAL, PLASTIC BAGS, STONES, FABRIC, EARTH COVERED ROOTS, SOFT LEAFY MATERIAL AND WASTE WITHOUT A FIRM CONSISTENCY (EG. KITCHEN WASTE)

TO PREVENT DAMAGE TO THE MACHINE IT IS RECOMMENDED THAT GARDEN MATERIAL GREATER THAN 40MM IS NOT FED INTO THE SHREDDER.

The following types of material can be used in the shredder:

- Twigs.
- Branches.
- Waste from cut bushes
- Waste from hedge trimming
- 1. Feed the material to be shredded into the feeding hopper.
- 2. The shredder will automatically pull the material through the rolling cutter head, shred it and extract it through the discharge chute.



Practical Tips

- · Branches and twigs should be shredded shortly after they are cut. They become extremely hard once dry and the maximum cutting diameter is reduced.
- Garden waste such as fresh foliage, creepers and vines contain a lot of moisture, this can result in material sticking to the cutter head. Such material should be allowed to dry for a few days before being fed into the shredder
- Always check material before shredding, ensure it does not contain any stones or nails as this may severely damage the shredder.
- Judge the quantity of material which you put into the hopper so that the funnel does not clog.
- Do not shred soft waste (e.g. kitchen waste) put it straight in the compost box.
- Entangled branches and leaves should be thoroughly shredded before loading any more material.
- Do not allow the discharge opening to become clogged with shredded material - risk of pile-ups.
- Do not cover the ventilation slits.
- Do not place heavy material or thick branches into the machine continuously. This may cause the blade to jam.
- Always store the shredder indoors in a dry place.