



Einhell

ACCESSORY



PXC-Starter-Kit

**18V 4-6Ah & 6A
Boostcharger**

Item No.: 4512143

Ident No.: 21012

Bar Code: 4006825667653

The Einhell 18V 4-6Ah PXC Starter Kit is the ideal basis for building up the PXC range in your home. A single rechargeable battery and charger for all tools saves significant costs of buying, and universal use also helps to protect the environment and provides flexibility. MULTI-Ah technology allows operation as a 6Ah battery for maximum runtime as well as a 4Ah battery for 3x longer total life. Latest generation lithium-ion cells create 100% more power for max. force in all applications. With the Einhell PXC-charger Power X-Boostcharger 6A, batteries can be charged within 60 minutes. The switchable boost mode significantly reduces loading times by 50%.


Features & Benefits

- Universal usability for all Power X-Change rechargeable devices:
- Saving money, protecting the environment, and flexibility
- Battery features:
 - MULTI-Ah technology: 6Ah pack for max. charge level or 4Ah pack
 - to protect the battery for 3x longer total lifetime
 - PLUS-technology: extra power for intensive operation
 - The ABS process-controlled battery management system stands for
 - max. safety, optimum performance, operating time + lifetime
 - Charge level indicated precisely as % on the digital display
 - Latest cells deliver 100 % more power for maximum performance
 - Freedom of cordless operation: No tangled cables and free working
 - Impact protection and good grip thanks to rubber-coated housing
 - Housing protected against dust, corrosion and mechanical damage
 - Suitable for TWIN-PACK use in power demanding 36V applications
- Charger features:
 - Fastest charger in the Power X-Change System
 - 50% reduced charging times due to shiftable Boostmode:
 - the 6Ah battery is ready-to-go in 60 min
 - Permanent battery monitoring for optimum charging
 - Refresh mode allows deeply discharged batteries to be reactivated
 - Maximum safety due to intelligent charge management
 - Current information on 6-stage status LED display
 - Integrated suspension eyelets for user-friendly wall-mounting



Technical Data

- Mains supply charger	200-240 V 50-60 Hz
- Voltage output charger	18 V
- Charging time	1h
- Voltage	18 V
- Battery capacity	6000 mAh
- Max. power	1350 W
- Amount of batteries	1 Pieces

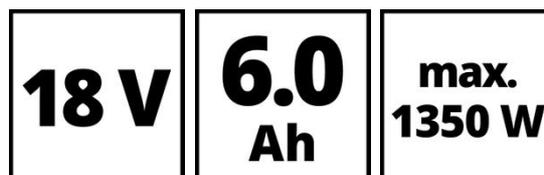

Logistic Data

- Product weight (kg)	1.88
- Gross weight (kg)	2.23
- Dimensions single packaging	323 x 98 x 248 mm
- Pieces per export carton	6 Pieces
- Gross weight of export carton	13.38 kg
- Dimensions export carton	430 x 355 x 310 mm
- Container quantity (20"/40"/40"HC)	3420 7098 8484