MAINTENANCE

- Keep the ventilation vents of the saw clean at all times, if possible, prevent foreign matter from entering the vents
- After each use, blow air through the saw housing to ensure it is free from all dust particles which may build up. Build up of dust particles may cause the saw to overheat and fail.
- If the enclosure of the saw requires cleaning, do not use solvents but a moist soft cloth only. Never let any liquid get inside the saw; never immerse any part of the saw into a liquid.

Carbon Brushes



saw will spark and/or stop. Discontinue use as soon as this happens. They should be replaced prior to recommencing use of the reciprocating saw. Carbon brushes are a wearing component of the reciprocating saw therefore not covered under warranty. Continuing to use the reciprocating saw when carbon brushes need to be replaced may cause permanent damage to

When the carbon brushes wear out, the reciprocating

the reciprocating saw. Carbon brushes will wear out after many uses but when the carbon brushes need to be replaced, take the reciprocating saw to an electrician or a power tool repairer for a quick and low cost replacement. Always replace both carbon brushes at the same time.

Note: Ozito Industries will not be responsible for any damage or injuries caused by the repair of the reciprocating saw by an unauthorised person or by mishandling of the reciprocating saw.

DESCRIPTION OF SYMBOLS

V	Volts	Hz	Hertz	
~	Alternating current	w	Watts	
spm	Strokes per minute	n₀	No load speed	
	Double insulated	8	Read instruction manual	
\land	Warning			

TROUBLESHOOTING

Sparking visible through the housing air vents

A small amount of sparking may be visible through the housing vents. This is normal and does not indicate a problem



Excessive sparking visible through the housing air vents and/or the saw failing to operate

May indicate the carbon brushes have worn out and need to be replaced. Carbon brushes should only be replaced by a qualified electrician or power tool repairer.

SPARE PARTS

Spare parts can be ordered from the Special Orders Desk at your local Bunnings Warehouse or Homebase store. For further information, or any parts visit www.ozito-diy.co.uk or contact Ozito Customer Service:

Great Britain: 0151 294 4488

Ireland: 1850 882711

E-mail: enquires@ozito-diy.co.uk

A ELECTRICAL SAFETY

WARNING! When using mains-powered tools, basic safety precautions, including the following, should always be followed to reduce risk of fire, electric shock, personal injury and material damage.

Read the whole manual carefully and make sure you know how to switch the tool off in an emergency, before operating the tool

Save these instructions and other documents supplied with this tool for future reference Before you connect the equipment to the mains supply make sure that the data on the rating plate are identical to the mains data



his tool is double insulated, therefore no earth wire is required

GENERAL POWER TOOL SAFETY WARNINGS - PERSONAL SAFETY

WARNING! Read all safety warnings and all instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury Save all warnings and instructions for future reference. The term "power tool" in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.

- . 1. Work area safetv
- a. Keep work area clean and well lit. Cluttered or dark areas invite accidents.
- b. Do not operate power tools in explosive atmospheres, such as in the presence o flammable liquids, gases or dust. Power tools create sparks which may ignite the dust or fumes.
- c. Keep children and bystanders away while operating a power tool. Distractions can cause you to lose control. 2. Electrical safety
- a. Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools. Unmo outlets will reduce risk of electric shock.
- b. Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges and refrigerators. There is an increased risk of electric shock if your body is earthed or arounded
- c. Do not expose power tools to rain or wet conditions. Water entering a power tool will increase the risk of electric shock.
- d. Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts. Damaged or entangled cords increase the risk of electric shock.
- e. When operating a power tool outdoors, use an extension cord suitable for outdoor use. Use of a cord suitable for outdoor use reduces the risk of electric shock.
- f. If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) protected supply. Use of an RCD reduces the risk of electric shock 3. Personal safety
- Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating power tools may result in serious personal injury.
- b Use personal protective equipment. Always wear eve protection. Protective equipment. such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries
- c. Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool. Carrying power

A RECIPROCATING SAW SAFETY WARNINGS

- Hold power tool by insulated gripping surfaces, when performing an operation where the cutting accessory may contact hidden wiring or its own cord. Cutting accessory contacting a "live" wire may make exposed metal parts of the power tool "live" and could give the operator an electric shock.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety
- Recommendations for the use of a residual current device with a rated residual current of 30mA or less
- Wear a safety helmet, safety glasses and/or face shield. It is also highly recommended that you wear a dust mask, ear protection and padded gloves.
- Check the blade carefully for cracks or damage prior to operation. Replace cracked or damaged blades immediate
- Hold the tool firmly during operation. Always hold the adjustable pivoting shoe firmly against the work piece.
- Ensure no one is below you when using the tool in elevated conditions Do not point the tool at anyone in the immediate vicinity. .

WARNING! When making a "blind" cut (you can't see behind what is being cut), be sure that hidden electrical wiring or water pipes are not in the path of the cut. If wires are present, they must be disconnected at their power source by a qualified person or avoided to prevent the possibility of lethal shock or fire.

- Water pipes in "blind" areas must be drained and capped before cutting.
- If the blade hits against objects during operation, damage to the tool or dangerous blade breakage may occur.

If the supply cord is damaged, it must be replaced by an electrician or a power tool repairer in order to avoid a hazard.

Note: Double insulation does not take the place of normal safety precautions when operating this tool. The insulation system is for added protection against injury resulting from a possible electrical insulation failure within the tool.

Using an Extension Lead

Always use an approved extension lead suitable for the power input of this tool. Before use, inspect the extension lead for signs of damage, wear and ageing. Replace the extension lead if damaged or defective When using an extension lead on a reel, always unwind the lead completely. Use of an extension lead not suitable for the power input of the tool or which is damaged or defective may result in a risk of fire and electric shock

tools with your finger on the switch or energising power tools that have the switch on invites accidents.

- Remove any adjusting key or wrench before turning the power tool on. A wrench or a key left attached to a rotating part of the power tool may result in personal
- Do not overreach. Keep proper footing and balance at all times. This enables better control of the power tool in unexpected situations
- Dress properly. Do not wear loose clothing or jewellery. Keep your hair, clothing and gloves away from moving parts. Loose clothes, jewellery or long hair can be caught in moving
- If devices are provided for the connection of dust extraction and collection facilities ensure these are connected and properly used. Use of dust collection can reduce dustrelated hazards.
- 4. Power tool use and care
- Do not force the power tool. Use the correct power tool for your application. The correct power tool will do the job better and safer at the rate for which it was designed
- Do not use the power tool if the switch does not turn it on and off. Any power tool that cannot be controlled with the switch is dangerous and must be repaired
- Disconnect the plug from the power source and/or the battery pack from the power tool before making any adjustments, changing accessories, or storing power tools. Such preventive safety measures reduce the risk of starting the power tool accidentally.
- Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool. Power tools are dangerous in the hands of untrained users.
- Maintain power tools. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. Many accidents are caused by poorly maintained power tools.
- Keep cutting tools sharp and clean. Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.
- Use the power tool, accessories and tool bits etc. in accordance with these instructions, taking into account the working conditions and the work to be performed. Use of the power tool for operations different from those intended could result in a hazardous situation
- a. Have your power tool serviced by a qualified repair person using only identical replacement parts. This will ensure that the safety of the power tool is maintained

- Watch out for cut-off portions of the work piece being cut. They may fall and cause injury to you or someone near you
- When cutting metals, be cautious of hot flying debris.
- Do not touch the blade or the work piece immediately after operation; they may be extremely hot and could potentially burn your skin.
- If you withdraw the blade from the work piece during operation, a strong reaction could be produced, which could cause the blade to snap or cause you to lose your grip and/or control of the saw. Always switch off the tool and wait until the blade has come to a complete stop before with drawing the blade from the work piece.

WARNING! Some dust created by power sanding, sawing, grinding, drilling and other construction activities contain chemicals known to cause cancer, birth defects or other reproductive harm

- Some examples of these chemicals are:
- Lead from lead-based paints;
- Crystalline silica from bricks, cement and other masonry products, and:
- Arsenic and chromium from chemically-treated timber.

The risk from such exposures vary depending on how often you do this type of work. To reduce your exposure to these chemicals; work in a well ventilated area, and work with approved safety equipment, such as those dust masks that are specifically designed to filter out microscopic particles.

Always wear eye protection and a dust mask for dusty applications and when drilling/ chiselling overhead. Sanding particles can be absorbed by your eyes and inhaled easily and may cause health complications.

RECIPROCATING SAW


920W

ORIGINAL INSTRUCTIONS

SPECIFICATIONS

Motor 920W No Load Speed: 800-3000spm Stroke Length: Tool-free Blade Fitment: Cutting Capacities: Timber 210mm Aluminium 20mm Non Allov Steel 10mm Weight: 3.5ka

ozito-diy.co.uk





RSW-5200U

Kit Box

YEAR REPLACEMENT WARRANTY

All of our products undergo strict quality checks to ensure that they reach

you in perfect condition. In the unlikely event that your device develops a

fault please contact our service department at the address shown on this

guarantee card. You can also contact us by telephone using the customer

1. These warranty terms regulate additional warranty services, which the

manufacturer mentioned below promises to buyers of its new products

in addition to their statutory guarantee claims are not affected by this

2. The warranty services only covers defects due to material or

been exposed to similar stresses during the guarantee period.

- Damage to the device caused by a failure to follow the assembly

manufacturing faults on a product which you have bought from the

manufacturer mentioned below are limited to either the rectification of said

Please note that our devices are not designed for use in commercial, trade

or professional applications. A guarantee contract will not be created if the

device has been used by commercial, trade or industrial business or has

instructions or due to incorrect installation, a failure to follow the operating

current type) or a failure to follow the maintenance and safety instructions

or by exposing the device to abnormal environmental conditions or by lack

instructions (for example connecting it to an incorrect mains voltage or

- Damage to the device caused by abuse or incorrect use (for example

overloading the device or the use or unapproved tools or accessories),

ingress of foreign bodies into the device (such as sand, stones or dust,

transport damage), the use of force or damage caused by external forces

defects on the product or the replacement of the product, whichever we

guarantee. Our guarantee is free of charge to you.

3. The following are not covered by our guarantee:

service number shown. Please note the following terms under which

WARRANTY

- Damage to the device or parts of the device caused by normal or natural wear or tear or by normal use of the device.

4. Your Product is guaranteed for a period of 36 months from the original date of purchase and is intended for DIY (Do It Yourself) use only. Lithium Ion batteries and chargers are covered by a 12 month warranty. Warranty excludes consumable parts. Guarantee claims should be submitted before the end of the guarantee period within two weeks of the defect being noticed. No guarantee claims will be accepted after the end of the guarantee period. The original guarantee period remains applicable to the device even if repairs are carried out or parts are replaced. In such cases, the work performed or parts fitted will not result in an extension of the guarantee period, and no new guarantee will become active for the work performed or parts fitted. This also applies if an on-site service is used.

IN ORDER TO MAKE A CLAIM UNDER THIS WARRANTY YOU MUST RETURN THE PRODUCT TO THE PLACE OF PURCHASE WITH YOUR REGISTER RECEIPT.

Please refer to the restrictions of this warranty concerning wearing parts, consumables and missing parts as set out in the service information in these operating instructions.

CUSTOMER SERVICE HELPLINE GB: 0151 294 4488 IRI · 1850 882711 Ozito-diy.co.uk

OZITO UK Unit 9 Stadium Court, Wirral International Business Park, Plantation Road, Bromborough, Wirral, CH62 3QG

WHAT'S IN THE BOX


Reciprocating Saw

quarantee claims can be made:

of care and maintenance

(for example by dropping it).

prefer.




KNOW YOUR PRODUCT

RECIPROCATING SAW

1	Pivoting Shoe (Adjustable)	4	Variable Speed D
2	Blade Holder	5	On/Off Trigger


- 3 Locking Button
- 6 Lock-on Button

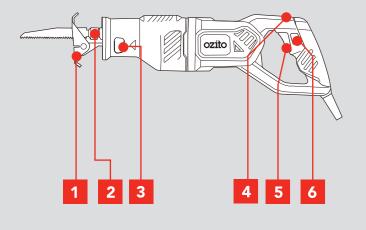

ACCESSORIES

Ļ

- 7 100mm Metal Cutting Blade
- 8 152mm Metal Cutting Blade
- 9 152mm Timber Cutting Blade
- 10 203mm Timber Cutting Blade 11 Kit Box

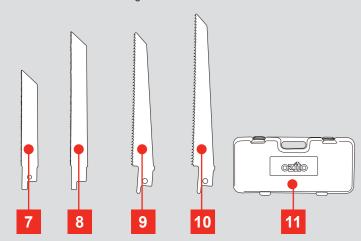

ONLINE MANUAL Scan this QR Code with your mobile device to take you to the online manual.




SETUP & PREPARATION


1. INSERTING & REMOVING BLADES

WARNING: Ensure the tool is disconnected from the power supply before performing any of the following operations.


1. Rotate the blade holder anti-clockwise.




2. Insert the blade through the pivot shoe and into the blade holder.



3. Release the blade holder.




4. Pull on the blade to ensure it is properly secured.




2. ADJUSTING THE PIVOT SHOE

If the blade loses its cutting efficiency in one place along its cutting edge, you can reposition the pivoting shoe to utilize a sharper, unused portion of the blades cutting edge.


1. Push the locking button to the left to unlock the pivot shoe.



2. Reposition the pivot shoe to the desired position.



3. Push the locking button back to the right to lock the pivot shoes position.



OPERATION

3. CONTROLS

The tool is recommended for use with a residual current device with a rated residual current of 30mA or less.

On/Off Trigger


to turn on.

1. Squeeze the on/off trigger 2. Release the on/off trigger to turn off.





Lock-on Button





2. Depress the lock-on button and then release the on/off

trigger.


Variable Speed

1. Scroll through the variable speed dial to select the appropriate speed for the task at hand.




4. CUTTING PROCEDURE


1. Firmly press the adjustable pivoting shoe against the work piece.



2. Turn the reciprocating saw on.



3. Keep the adjustable pivot shoe firmly against the workpiece throughout the cut.

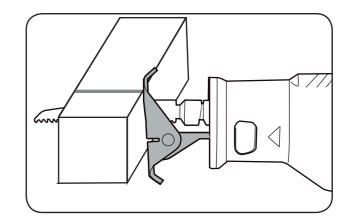

DO NOT ALLOW THE TOOL TO BOUNCE. IF THE PIVOT SHOE IS HELD AWAY FROM THE WORK PIECE DURING OPERATION, STRONG VIBRATION AND/OR TWISTING MAY OCCUR CAUSING THE BLADE TO SNAP DANGEROUSLY.

RSW-5200U