MAINTENANCE

BEFORE CLEANING YOUR BLOWER VAC OR CARRYING OUT ANY MAINTENANCE PROCEDUR MAKE SURE THE BATTERIES ARE REMOVED TO PREVENT ACCIDENTAL STARTING.

Cleaning and storing

- There are no user serviceable parts in the blower vac; if a fault is suspected, return the blower vac to a power tool repairer.
- Keep air intake clean and air vents free from debris to avoid overheating the motor.
- Do not use cleaning agents to clean the plastic parts of the blower vac. A mild detergent on a damp cloth is recommended. Water must never come into contact with the blower vac.
- If the blower vac vibrates abnormally, stop motor immediately. Abnormal vibration usually indicates a mechanical problem continued operation could lead to injury or
- No lubrication is necessary as the motor is equipped with lifetime-lubrication
- Keep the ventilation vents of the blower vac clean at all times, if possible, prevent foreign matter from entering the vents After each use, blow air through the blower vac housing to ensure it is free from
- all dust particles which may have built-up. Build up of dust particles may cause the blower vac to overheat and fail.
- If the enclosure of the blower vac requires cleaning do not use solvents but a moist soft cloth only. Never let any liquid get inside the blower vac; never immerse any part of the blower vac into liquid.
- When not in use, the blower vac should be stored in a dry, frost free location not within the reach of children.

Note: Ozito Industries will not be responsible for any damage or injuries caused by the repair of the blower vac by an unauthorised person or by mishandling of the blower vac. This tool is designed for DIY use - use in commercial or industrial environments will void the warranty.

TROUBLESHOOTING

Problem	Cause	Remedy
Poor Suction	Collection bag full	Empty the collection bag.
	Clogged air tubes	Remove any debris or built up within the upper and lower tubes.
	Clogged collection bag connector	Remove the collection bag, remove build up of debris from connector & outlet in the housing.

Battery protection system

The tool is equipped with the battery protection system, which helps to ensure a long service

The output power automatically cuts off during operation when the tool and/or battery are placed under the following situations

When the tool is overloaded:

If this occurs, release the trigger switch and remove causes of overload, then pull the switch trigger again to restart.

• When the remaining battery capacity becomes low: Recharge the battery pack.

Note: The battery protection system does not in any way damage the tool.

Note: The indicated capacity may be lower than the actual level during use or immediately after using the tool.

LED lights do not illuminate on charger

Check the charging adaptor is securely plugged into the wall outlet. Check the battery is firmly connected to the charging cradle. Check that the charging jack is securely connected to the charging cradle.

Sparking visible through the housing air vents

A small amount of sparking may be visible through the housing vents. This is normal and does not indicate a problem.

SPARE PARTS

Spare parts can be ordered from the Special Orders Desk at your local Bunnings Warehouse or Homebase store. For further information, or any parts visit

www.ozito-diy.co.uk or contact Ozito Customer Service: Great Britain: 0151 294 4488

Ireland: 1850 882711

E-mail: info@ozito-div.co.uk

DESCRIPTION OF SYMBOLS

V	Volts	Hz	Hertz
~	Alternating current	w	Watts
dc/	Direct current	Ø	Diameter
\triangle	Warning	no	No load speed
/min ⁻¹	Revolutions or reciprocation per minute		Double insulated
③	Read instruction manual	98 dB	Sound power level
		3	Wear eye and ear protection.
	Do not use in the rain or leave the blower vac outdoors while raining.		
	Keep hands out of the openings while the tool is running		

| Keep bysiangers away. 25 | children or pets are in the area.


Keep bystanders away. Do not operate whilst people especially

A BATTERY AND CHARGER SAFETY WARNINGS

THIS MANUAL CONTAINS IMPORTANT SAFETY AND OPERATING INSTRUCTIONS FOR YOUR BATTERY CHARGER. Before using the charger read all instructions and cautionary markings on the charger, battery pack and the product

- using the battery pack. This charger is not intended for any uses other than charging rechargeable batteries. Any other use may result in risk of
- fire, electric shock or electrocution Do not place any object on top of the charger or place the charger on a soft surface that may result in excessive internal
- To reduce risk of damage to the electric plug and cord, pull by the plug rather than the cord when disconnecting the
- Make sure the cord is located so that it will not be stepped on, tripped over, or otherwise subjected to damage or stress.
- An extension cord should not be used unless absolutely necessary. Use of an improper extension cord could result in the risk of fire, electric shock or electrocution.
- Do not operate the charger if it has received a sharp blow, been dropped or otherwise damaged in any way. Have it checked by an electrician or power tool repairer.
- 8. Do not disassemble charger. Take it to an electrician or power tool repairer when service or repair is required. Incorrect reassembly may result in a risk of electric shock, electrocution or fire
- To reduce risk of electric shock, unplug the charger from the outlet before attempting any cleaning. Removing the attery nack will not reduce this risk
- Never attempt to connect 2 chargers together. DO NOT store or use the tool and battery pack in locations where the temperature may reach or exceed 40°C (such as inside
- The charger is designed to operate on standard household electrical power (240 volts). Do not attempt to use it on any
- The battery pack is not fully charged out of the carton. First read the safety instructions and then follow the charging
- The longest life and best performance can be obtained if the battery pack is charged when the air temperature is between 18 - 24°C. Do not charge the battery pack in an air temperature below 10°C or above 40°C. This is important
- and will prevent damage to the battery pack. 15. Do not incinerate the battery pack even if it is seriously damaged or is completely worn out. The battery can explode in a
- Never attempt to open the battery pack for any reason. If the plastic housing of the battery pack breaks or cracks, immediately
- 17. During charging, the battery must be placed in a well ventilated area.

A ELECTRICAL SAFETY



Read the whole manual carefully and make sure you know how to switch the tool off in an emergency, before operating the too ave these instructions and other documents supplied with this tool for future reference.

Please Before you connect the charger to the mains supply make sure that the data on the rating plate are identical to the mains dat

tools charger is double insulated therefore no earth wire is required

If the supply cord is damaged, it must be replaced by an electrician or a power tool repairer in order to avoid a hazard

Note: Double insulation does not take the place of normal safety precautions when operating this tool. The insulation system is for

ne power supply for this products charger should be protected by a residual current device (rated at 30mAor less). A residual curr

added protection against injury resulting from a possible electrical insulation failure within the tool.

▲ GENERAL POWER TOOL SAFETY WARNINGS

WARNING! Read all safety warnings and all instructions. Failure to follow the warnings and Save all warnings and instructions for future reference. The term "power tool" in the

warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.

1. Work area safety Keep work area clean and well lit. Cluttered or dark areas invite accidents.

- Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust. Power tools create sparks which may ignite the dust or fumes.
- Keep children and bystanders away while operating a power tool. Distractions can cause you to los
- Electrical safety

 Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools. Un

 - Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges Do not expose power tools to rain or wet conditions. Water entering a power tool will increase the risk
 - Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts. Da
 - When operating a power tool outdoors, use an extension cord suitable for outdoor use.
 - If operating a power tool in a damp location is unavoidable, use a residual current device
 - a. Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol
 - Use personal protective equipment, Always wear eye protection, Protective equipment such as du
 - Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool. Carrying power tools w
 - Remove any adjusting key or wrench before turning the power tool on. A wrench or a key left
 - Do not overreach. Keep proper footing and balance at all times. This enables better control of the

Dress properly. Do not wear loose clothing or jewellery. Keep your hair, clothing and

device reduces the risk of electric shock

- If devices are provided for the connection of dust extraction and collection facilities,
- Power tool use and care

 Do not force the power tool. Use the correct power tool for your application. The correct
- b Do not use the power tool if the switch does not turn it on and off. Any power tool that cannot be
- Disconnect the plug from the power source and/or the battery pack from the power Store idle power tools out of the reach of children and do not allow persons unfamiliar
- with the power tool or these instructions to operate the power tool. Power tools are dangerous i
- Maintain power tools. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. Many accidents are caused by poorly maintained power tool below. Keep cutting tools sharp and clean. Properly maintained cutting tools with sharp cutting edges are less likely to
- Use the power tool, accessories and tool bits etc. in accordance with these instructions taking into account the working conditions and the work to be performed. Use of the power
- . Battery tool use and care Recharge only with the charger specified by the manufacturer. A charger that is suitable for one
- Jse power tools only with specifically designated battery packs. Use of any other battery packs may When battery pack is not in use, keep it away from other metal objects, like paper clips,
- coins, keys, nails, screws or other small metal objects, that can make a connection from
- Under abusive conditions, liquid may be ejected from the battery; avoid contact. If contact accidentally occurs, flush with water. If liquid contacts eyes, additionally seek medical help. Liquid ejected from the battery may cause irritation or burns.
- Have your power tool serviced by a qualified repair person using only identical

▲ BLOWER VAC SAFETY WARNINGS

Always wear adequate protective clothing when operating the tool to avoid injuries to face, eyes, hand, feet, head or nearing. Use safety glasses or a face shield, high boots or sturdy shoes, long trousers, work gloves, a hard hat and ear

Do not start the tool when it is upside down or when it is not in the operating position. Switch the motor off and remove the plug when the tool is not being used, left unattended, being cleaned, being moved

from one place to another or when the extension cord is entangled or damaged Do not operate the tool near people, especially children or pets. Turn it off if they get too close. Maintain a safe distance of at least 5m from other people when using the tool.

Never direct the blower direction nozzle towards bystanders or pets. Never blow debris in the direction of bystanders or pets. The operator is responsible for accidents or hazards occurring to other people or their property.

Do not handle the plug or the tool with wet hands and do not use the tool in the rain. Keep all the air intakes and the blower tube free of dust, lint, hair and other material that may cause a reduction in air flow. Keep a balanced and stable stance while using the tool. Do not switch on the tool in enclosed or poorly ventilated spaces or

in the presence of inflammable and/or explosive substances such as liquids, gasses and powders Do not get distracted and always concentrate on what you are doing. Use common sense. Never operate the tool when you are tired, sick or under the influence of alcohol or other drugs

Do not operate this appliance with long loose hair or loose fitting jewellery. Tie long loose hair back and remove loose fitting

Only operate the tool during broad daylight or with adequate artificial light. This appliance is not intended for use by young children or infirm persons unless they have been adequately supervised by a

responsible person to ensure that they can use the appliance safely. Young children should be supervised to ensure that they do not play with the appliance. Only use the tool according to the instructions given in this manual.

Check regularly that the screws are tight. Do not allow the blower vac to pick up any burning or smouldering materials like ashes, cigarette butts etc.

Do not attempt to pick up breakable objects like glass, plastics, china etc. Do not use in vacuum operation without the collection had fitted

Do not use in the rain or leave outdoors while raining.

Read the instructions carefully. Be familiar with the controls and the proper use of the appliance

· Never allow children to use the appliance • Never allow people unfamiliar with these instructions to use the appliance. Local regulations may restrict the age of the

Never operate the appliance while people, especially children, or nets are nearby.


The operator or user is responsible for accidents or hazards occurring to other people or their property

2) Preparation

- . While operating the appliance, always wear substantial footwear and long trousers.
- Do not wear loose clothing or jewellery that can be drawn into the air inlet. Keep long hair away from the air inlets. Wear protective googles while operating.
- To prevent dust irritation the wearing of a face mask is recommended
- . Never operate the appliance with defective guards or shields, or without safety devices, for example debris collector in

3) Operation

- . Disconnect the appliance from the battery whenever you leave the machine;
- before clearing a blockage:
- before checking, cleaning or working on the appliance if the appliance starts to vibrate abnormally
- Operate the appliance only in daylight or in good artificial light. Do not overreach and keep your balance at all times.
- Always be sure of your footing on slopes. · Walk, never run. . Keep all cooling air inlets clear of debris
- · Never blow debris in the direction of bystander 4) Maintenance and storage
- · Keep all nuts, bolts and screws tight to be sure the appliance is in safe working condition.
- Check the debris collector frequently for wear or deterioration. · Replace worn or damaged parts.
- Use only genuine replacement parts and accessories
- Store the appliance only in a dry place.

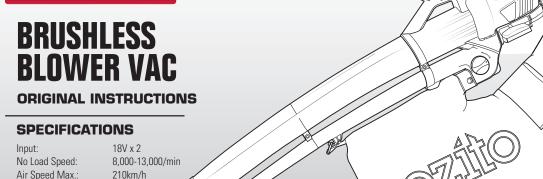




2 X 18V LITHIUM ION

Air Speed Max.: Suction Power: 720m³/h 10.1 Mulching Ratio: 45 litres Collection Bag:

3.3kg

ozito-diy.co.uk

Weight:



Auxiliary Handle, Guide Wheels & Wheel Support

> Assembly Screws x 3 Battery & Charger

> > sold separately

PXCBLVS-018U

WARRANTY

All of our products undergo strict quality checks to ensure that they reach you in perfect condition. In the unlikely event that your device develops a fault, please contact our service department at the address shown on this guarantee card. You can also contact us by telephone using the customer service number shown. Please note the following terms under which quarantee claims can be made:

. These warranty terms regulate additional warranty services, which the manufacturer mentioned below promises to buyers of its new products in addition to their statutory guarantee claims are not affected by this guarantee. Our guarantee is free of charge to you.

2. The warranty services only covers defects due to material or manufacturing faults on a product which you have bought from the manufacturer mentioned below are limited to either the rectification of said defects on the product or the replacement of the product, whichever we prefer

Please note that our devices are not designed for use in commercial, trade or professional applications. A guarantee contract will not be created if the device has been used by commercial, trade or industrial business or has been exposed to similar stresses during the quarantee period.

3. The following are not covered by our guarantee: - Damage to the device caused by a failure to follow the assembly instructions or due to incorrect installation, a failure to follow the operating instructions (for example connecting

it to an incorrect mains voltage or current type) or a failure to follow the maintenance and safety instructions or by exposing the device to abnormal environmental conditions or by lack of care and maintenance - Damage to the device caused by abuse or incorrect use (for example overloading the device or the use or unapproved tools or accessories), ingress of foreign bodies into the

device (such as sand, stones or dust, transport damage), the use of force or damage caused by external forces (for example by dropping it). - Damage to the device or parts of the device caused by normal or natural wear or tear or by normal use of the device.

4. Your Product is guaranteed for a period of 60 months from the original date of purchase and is intended for DIY (Do It Yourself) use only. Lithium Ion batteries and chargers are

covered by a 12 month warranty. Warranty excludes consumable parts. Guarantee claims should be submitted before the end of the guarantee period within two weeks of the defec being noticed. No guarantee claims will be accepted after the end of the guarantee period. The original guarantee period remains applicable to the device even if repairs are carried out or parts are replaced. In such cases, the work performed or parts fitted will not result in an extension of the guarantee period, and no new guarantee will become active for the work performed or parts fitted. This also applies if an on-site service is used.

IN ORDER TO MAKE A CLAIM UNDER THIS WARRANTY YOU MUST RETURN THE PRODUCT TO THE PLACE OF PURCHASE WITH YOUR REGISTER RECEIPT.

Please refer to the restrictions of this warranty concerning wearing parts, consumables and missing parts as set out in the service information in these operating instructions.

CUSTOMER SERVICE HELPLINE GB: 0151 294 4488 IRL: 1850 882711 Ozito-diy.co.uk

OZITO UK Unit 9 Stadium Court, Wirral International Business Park, Plantation Road, Bromborough, Wirral, CH62 3QG


KNOW YOUR PRODUCT

Brushless Blower Vac

1. Guide Wheels 7. On/Off Trigger 2. Lower Tubes 8. Collection Bag 3. Upper Tubes 9. Mode Selector 4. Auxiliary Handle 10. Battery Seating

5. Shoulder Strap Hook

6. Variable Speed Dial

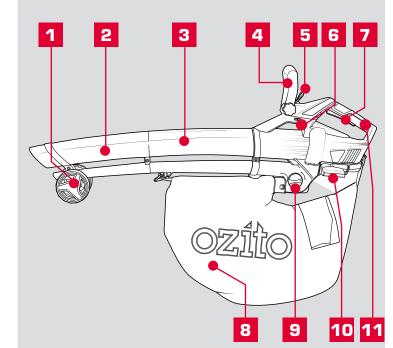

11. Main Handle

ACCESSORIES

13. Assembly Screws 1 x 16mm, 2 x 50mm long.

BATTERY & CHARGER (sold separately)

This tool is compatible with all battery and chargers from the Ozito Power X Change Range.

> **ONLINE MANUAL** Scan this QR Code with your mobile device to take you to the online manual.



SETUP & PREPARATION


ASSEMBLY

ENSURE THE TOOL IS OFF & THE BATTERY REMOVED BEFORE PERFORMING ANY OF THE FOLLOWIN

Assembling the Tubes


1. Place the lower tube onto the

2. Secure the tubes together with supplied 50mm long security screw using a flat tip screwdriver (not included).



Note: Once installed the security screw cannot be removed.


3. Feed the top of the assembled 4. Secure in place with the tubes into the motor housing. Push remaining 50mm long security together until they are connected screw.




long screw using cross tip

screwdriver (not included).

5. Slide the wheel support over the 6. Secure with the supplied 16mm lower tube as far as the stop.




7. Place both wheels onto either side of the bracket, push to lock in place.



Attaching the Auxiliary Handle


. Place the handle over the motor 2. Insert the bolt and secure turning housing so it is positioned



clockwise. Do not overtighten.

Attaching the Collection Bag

. Attach the clip on the collection 2. Attach the plastic connector on bag to the hook underneath the



the collection bag to the outlet

in the motor housing. Ensure the

3. Place the plastic connector on the collection bag to the hook on the motor housing.



shoulder strap hook and adjust

the length as required.

Fitting the Shoulder Strap

1. Unscrew the knurled nut on the 2. Re-tighten the knurled nut on the shoulder strap hook and place the strap through the gap.



Note: To use the shoulder strap simply slide the strap over your shoulder so that some of the weight of the blower vac can be taken by your

2. BATTERY & CHARGING (SOLD SEPARATELY)

CAUTION: THE CHARGER FOR THIS PRODUCT SHOULD BE PROTECTED BY A RESIDUAL CURRENT DEVICE (RATED AT 30mA OR LESS).

The purchased battery will be shipped in a low charge condition, and requires charging prior to use. Allow several cycles of charging and discharging (through use of the tool) for the battery to reach its optimum performance / runtime.


Charging your lithium ion battery - Fast Charger

. Connect the charger into a mains power outlet.

The charger LED will flash green showing power is being supplied to the charger.



With the charger sitting on a flat surface, align the raised ribs on the battery with the recess in the charger and slide onto the charger ensuring a firm connection.



4. The charger LED will illuminate 5. The charger LED will illuminate red signifying that the battery is green once the battery is charged.




|--|--|

Charger LED Indicator		
LED Indicator	Situation	
GREEN (Flashing)	Stand By (no battery pack is inserted).	
RED (Flashing)	Battery is charging (low charge).	
RED (Illuminated)	Battery is charging (mid charge).	
GREEN (Illuminated)	Battery is 85% - 100% charged and ready for use.	
BOTH(Illuminated)	Battery pack is too hot or too cold (charging will begin automatically when battery reaches correct charging temperature).	
BOTH (Flashing)	Defective battery. Never charge a defective battery pack! Remove battery pack from charger.	

Charging your lithium ion battery - Eco Charger

1. Connect the charger into a mains power outlet.



With the battery sitting on a flat surface, align the raised ribs on the battery with the recess in the charger and slide onto the battery ensuring a firm connection.

4. The charger LED will illuminate red signifying that the battery is charging.

5. When removing the charger from the battery, first press the battery release tab, then slide the charger from its


Charger LED Indicator




LED Indicator	Situation	
GREEN (Flashing)	Stand By (no battery pack is inserted).	
RED (Illuminated)	Battery is charging (low charge).	
GREEN (Illuminated)	Battery is charged and ready for use.	
RED (Flashing)	Battery or Charger fault.	
RED & GREEN (Flashing)	Battery pack is too hot or too cold (remove battery from charger and store at room temperature 20°C. Insert battery again when at correct charging temperature). If this happens again, the battery is defective and needs to be replaced.	

Battery Charge Indicator

The purchased battery is equipped with a battery charge indicator to show the state of the battery charge. Press the charge indicator button and look to see which LED lights.






Note: The battery needs to be removed from the tool to check the state of charge.

3. INSERTING & REMOVING THE BATTERIES

Inserting the Batteries into the Blower Vac


Note: Always use 2 batteries of the same capacity and same charge state with the blower vac.

Slide two batteries of the same capacity and same charge state into the rear of the blower vac aligning the ribs so that they click



Removing the Batteries from the Blower Vac

Press and hold the battery release tab to release a battery and slide the battery out.



Note: Batteries can be easily removed and inserted with the collection bag

4. CONTROLS

On/Off Trigger

1. Squeeze the on/off trigger to 2. To stop operation, release the start. Motor will start after a short delay.


Variable Speed Dial

Mode Selector

To select the blower function

turn the dial right to the blower

air, move the dial to the "MAX"



variable speed dial to a lower

speed, or "MIN" setting.

2. To select the vacuum / mulching

vacuuming icon.


function turn the dial left to the



The flow of air can be regulated by turning the variable speed dial.

To achieve the greatest flow of
 To lower the air speed rotate the





APPLICATIONS

5. USING THE BLOWER VAC

attached and zipped up correctly.

1. Make sure the collection bag is 2. Make sure two batteries of the






4. Set the variable speed dial to the

same capacity and same charge

state are inserted into the blower

5. Turn on by squeezing the On/Off



Emptying the Collection Bag

ENSURE THE TOOL IS OFF & THE BATTERY EMOVED. WAIT UNTIL THE IMPELLOR HAS STOPPED EFORE ATTEMPTING TO EMPTY OR REMOVE THE





