


Versatile & powerful!

Einhell®


NEW GENERATION



The SB 1020/1 D precision pillar drill is equipped with a V-belt drive, a continuously height-adjustable, tilting and laterally pivoting drilling table, a ball-raced drill spindle, an adjustable bottom stop, an ON/OFF switch with no-load function, a contact switch in the V-belt housing, and a folding eye shield. This model is serially supplied with a vice and a fast clamping drill chuck. **In addition, the SB 1020/1D is equipped with a left/right switch for changing the drilling direction. Drilling speed can be adjusted to meet the requirements of any material thanks to the 12-fold rotation speed graduation.**

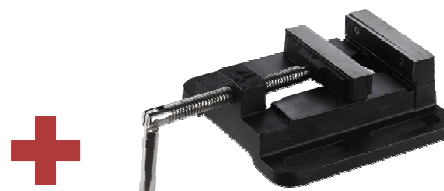

Vice included

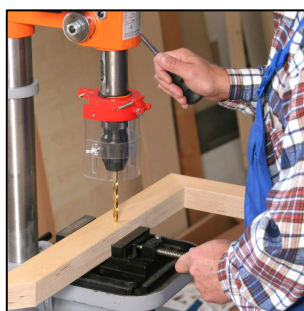

SB 1020/1 D Pillar Drill

Logistic Information:

Type:	SB 1020/1 D	Sales unit:	1 pc
Art. No.:	42.507.90	20°:	224 pcs
Ident. No.:	01027	40°:	446 pcs
Bar Code:	4006825 505016	40° HC:	-- pcs
Packing:	800x490x290 mm	Weight:	53.9 kgs (gross)



Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations may contain accessories not included in the standard scope of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustrations will be similar (in design), production-related modifications reserved without prior notice.

File: S:\shared-pool\Product-Dokumentation\T-Produktbeschreibung\30_n0\Originale_Englisch_PA04\4250790_01027.doc
Erstelldatum/create date: 12.12.2007 15:49:00Aktualisiert/up dated: 12.12.2007

Versatile & powerful!

Einhell®

NEW GENERATION



Features:

- MK2 collet
- Fast clamping drill chuck
- Left/right switch
- Continuously adjustable table height
- Adjustable depth stop for precision drilling
- 12-fold speed graduation 120-2,500 min⁻¹
- Practical vice included
- Ball-raced drill spindle
- Stable base table
- Drill table (tiltable, pivoting)
- ON/OFF switch with zero voltage release
- High-grade gummed handle

Technical Data:

- Mains: 400 V ~50Hz
- Power: 700 watts (S2 15 min.)
- Motor speed: 1,400 min⁻¹
- Spindle speed: 12 step 120 – 2,500 min⁻¹
- Drill table tilt: -45° to + 45°
- Fast clamping drill chuck: Ø 3 to 16 mm
- Drill chuck mount: B16
- Drill spindle conus: MK 2
- Throat: 169 mm
- Max. drill depth: 80 mm
- Pillar diameter mm: 70 mm
- Size of base table: 405 x 240 mm
- Size of drill table: 260 x 260 mm
- Height: 1,010 mm

Logistic Information:

Type:	SB 1020/1 D	Tool:	Pillar Drill
Art. No.:	42.507.90	Sales unit:	1 pc
Ident. No.:	01027	20`:`	224 pcs
Bar Code:	4006825 505016	40`:`	446 pcs
Packing:	800x490x290 mm	40``HC:	-- pcs
		Weight:	53.9 kgs (gross)



Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations may contain accessories not included in the standard scope of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustrations will be similar (in design), production-related modifications reserved without prior notice.

File: S:\shared-pool\Product-Dokumentation\T-Produktbeschreibung\30_n0\Originale_Englisch_PA04\4250790_01027.doc
 Erstelldatum/create date: 12.12.2007 15:49:00Aktualisiert/up dated: 12.12.2007