



The PKS 250/430 L sliding cross-cut and mitre table saw for easy, precise and smooth cutting of wood parts.

The saw even allows double mitre cuts thanks to its tilting and swivelling motor head. For increased cutting precision, the saw has been equipped with a laser function, i.e. a laser beam is projected onto the section plane of the workpiece. The serially supplied base frame allows working at optimum working heights. Thanks to its sliding function, the saw can make cuts up to 430mm wide and is therefore ideal for cutting wide panels and laminate floorboard in one go.



PKS 250/430 L Sliding, cross-cut and mitre saw with base frame

Available as special accessory: Carbide-tipped saw blade: Art. No.: 43.111.10

Ø 250 x Ø 30 mm 24 teeth | Ident. No.: 01023

250 X Ø 30 mm 24 teeth Ident. No.: 01023 Bar Code: 4006825 431223

Carbide-tipped saw blade: Art. No.: 43.111.11 Ø 250 x Ø 30 mm 48 teeth ldent. No.: 01023

Bar Code: 4006825 431230

 Carbide-tipped saw blade:
 Art. No.:
 43.111.13

 Ø 250 x Ø 30 mm 60 teeth
 Ident. No.:
 01013

Bar Code: 4006825 503166

Logistic Information:


PKS 250/430 L Type: Sales unit: 1 pc Art. No.: 43.006.74 130 pcs 20``: 40``: Ident. No.: 01016 270 pcs 40``HC: Bar Code: 8591661084024 -- pcs

Packing: 870 x 560 x 440 mm **Weight:** 33.7 kgs (gross)



Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations may contain accessories not included in the standard scope of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustrations will be similar (in design), production-related modifications reserved.without prior notice.



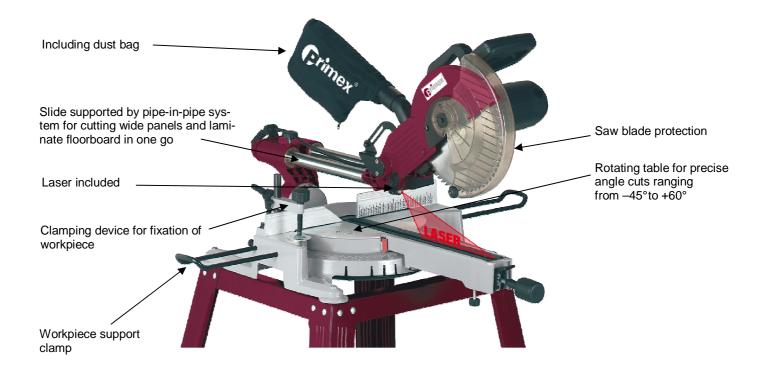

Stable base frame included









Features:

- Slide supported by pipe-in-pipe system
- Carbide-tipped saw blade with 60 teeth
- Rotating table for precise angle cuts ranging from -45°to +60°
- Motor head continuously tiltable to the left from 0°to +45°
- Clamping device for fixation of the workpiece
- Including dust bag and work piece support clamp
- Including laser

Bar Code:

- Convenient saw blade storage on the backside

Technical Data:

- Main: - Power:

- No load speed no:

- Carbide-tipped saw blade:

- No. of teeth:

- Turning range:

- Mitre cut:

- Cutting width 90°x 90°

230 V ~ 50 Hz 2,000 watts 4.800 min⁻

Ø 250 x Ø 30 x 3.0 mm

-45% 0%+60° 0° to 45° to the left 430 x 75 mm

Logistic Information:

PKS 250/430 L Type: Tool: Sliding, cross-cut and mitre saw 1 pc Sales unit: Art. No.: 43.006.74 20``: 130 pcs Ident. No.: 01016 40 270 pcs

8591661084024 40"HC: -- pcs Packing: 870 x 560 x 440 mm Weight: 33.7 kgs (gross)



Abbildungen können nicht im Serien-Lieferumfang enthaltenes Zubehör darstellen / Illustrations may contain accessories not included in the standard scope of delivery. Abbildungen ähnlich, produktionsbedingte Abweichung vorbehalten / Illustrations will be similar (in design), production-related modifications reserved.without prior notice.